INSIGNIA™

# QUICK SETUP GUIDE

32" LED TV
NS-32D201NA14

**Thank you**
for purchasing this state-of-the-art Insignia television. We hope you enjoy the quality and reliability of this television for years to come.

**FIND YOUR *USER GUIDE* ONLINE!**
We are going green so a copy of your *User Guide* is not provided in the box but is available online.
Go to www.insigniaproducts.com, then click **Support & Service**. Enter your model number in the box under **Manual, Firmware, Drivers & Product Information**, then click ▶.

## 1 START HERE

### How do I attach the stand to my TV?
(not for wall mounting)

**You'll need:** A Phillips screwdriver and a soft surface to lay the TV on.

**A** Carefully place your TV face-down on a cushioned, clean surface to protect the screen from damages and scratches.

**B** Secure the stand column to the TV using the three provided T4 12 mm screws. (These are the short screws.)

**C** Secure the TV stand to the stand column with the provided T4 14 mm screw. (This is the long screw.)

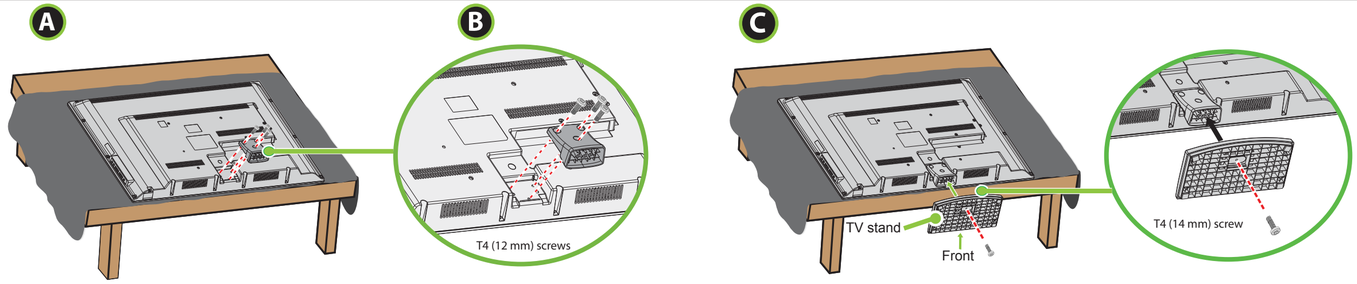


**- OR -**

### How do I prepare my TV for wall mounting?
(not for use with a TV stand)

- Carefully place your TV face-down on a cushioned, clean surface to protect the screen from damages and scratches. See the instructions that came with your wall mount for more information about how to correctly mount your TV.

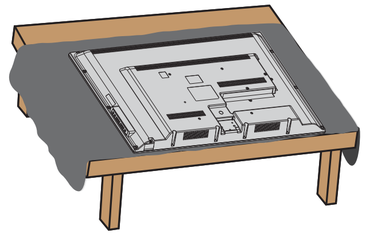

**STOP!**
Do not plug your power cord in until all other devices have been connected.

### Included accessories

Remote control and two AAA batteries

Stand column



TV stand

T4 screws (12 mm length) (3 pcs.)

T4 screw (14 mm length) (1 pc.)

### Which cables do you have?

***Your TV has several different jacks for connecting devices. For the best video quality, use the best available connection. Use the cables that came with your devices.***

| VIDEO QUALITY | JACK TYPE | CABLE CONNECTOR |
|---|---|---|
| BEST | HDMI video/audio | |
| BETTER | Component video and analog audio |  |
| GOOD | Composite video and analog audio |  |
| GOOD | Coaxial video/audio |  |

**Note:** You can use the **HDMI 1 (DVI+ARC)** jack to connect a DVI device to your TV. Attach an HDMI-to-DVI adapter to the end of the HDMI cable. The adapter connects to the DVI device's jack. See your online *User Guide* for more information about different types of HDMI (ARC , DVI or MHL).

### Features

***Front view***




***Back view***




**Note:** Images do not necessarily represent the exact design of your television.

## 2 MAKING CONNECTIONS

### How do I watch TV (cable or satellite receiver) or connect a device such as a DVD or Blu-ray Disc player, game console, or camcorder?

***Using an HDMI cable* (BEST)**

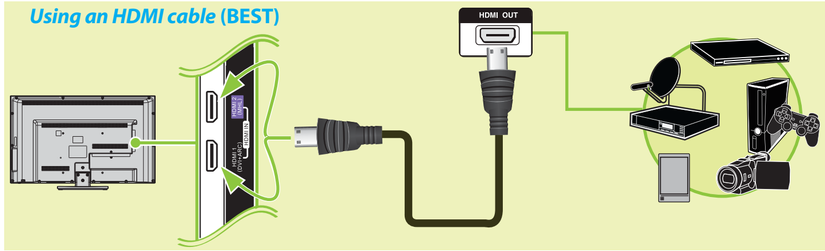


**Multi-purpose jacks:** You can plug any device that uses HDMI into either HDMI jack. However, certain devices must be connected to the DVI+ARC or MHL jack. See the instructions that came with your ARC, DVI, or MHL-enabled device for more information.

**Note:** The **HDMI1(DVI+ARC)** jack is a shared jack. This means that you can connect only one ARC or DVI device at a time.

***Using component cables* (BETTER)**
**- OR -**
***Using an AV cable***
**(GOOD)**

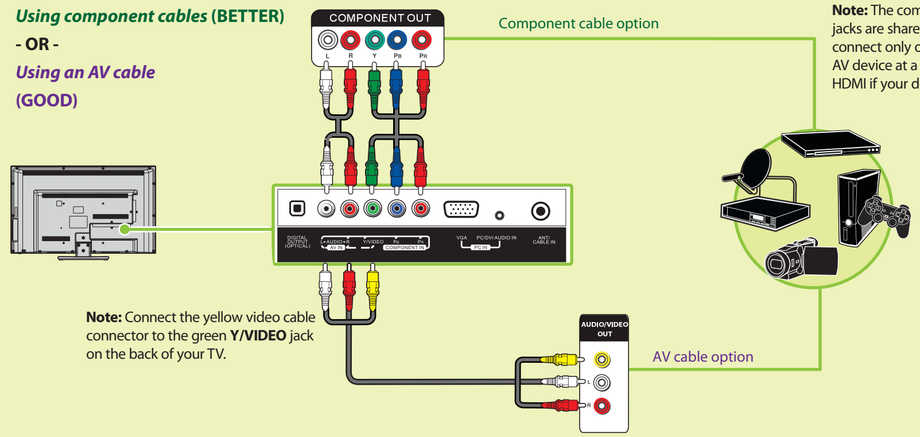


**Note:** Connect the yellow video cable connector to the green **Y/VIDEO** jack on the back of your TV.

**Note:** The component video and AV jacks are shared. This means you can connect only one component video or AV device at a time. We suggest using HDMI if your device supports it.

### How do I connect my TV to an antenna or cable wall jack?

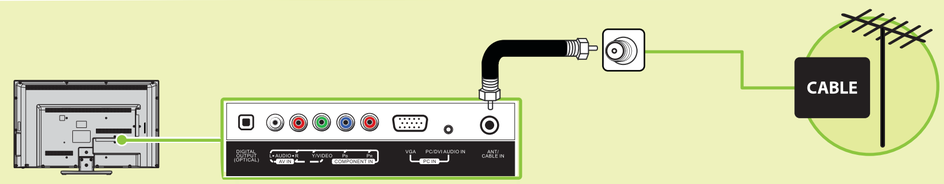


OVER

## 3 CONNECTING AUDIO DEVICES

### How do I connect my TV to external speakers?

***Using digital audio***

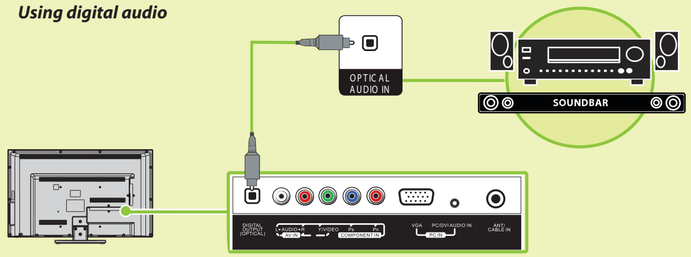


**Note:** Refer to the instructions that came with your speakers for more information.

**- OR -**

***Using analog audio***

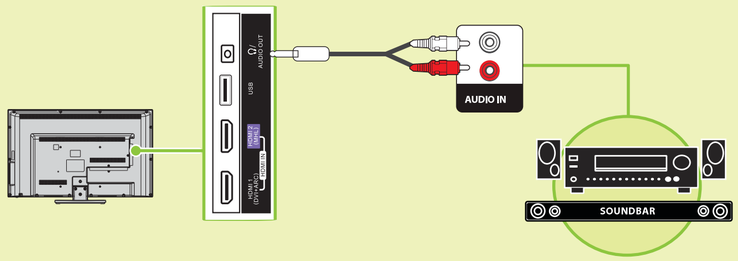


**Note:** Refer to the instructions that came with your speakers for more information.

## 4 TURNING ON MY TV

### When can I turn on my TV?

The best time to turn on your TV is after you have attached the TV stand or wall-mounted your TV and connected all devices.

**1** Plug the power cord into a power outlet.




**2** Install the remote control batteries.



**3** Press ⏻ (power) on your remote control.
**4** Follow the on-screen instructions.

### Using your remote control







***What are my screen-size options?***

**NORMAL:** Original aspect ratio is preserved. Black bars are present if content is not widescreen (16:9).

**ZOOM:** Expands the image to fill the screen. The top and bottom of the image may be cropped.

**WIDE:** Displays content recorded in a 16:9 (wide-screen) aspect ratio.

**CINEMA:** Stretches the image at the edges, but keeps a clear image in the center.

**AUTO:** Automatically adjusts the image based on the screen size and the TV program. Select this option if you are uncertain which aspect ratio to choose. **Note: Auto** is only available when **Auto Aspect Ratio** in the *CHANNELS* menu is set to **On**.

**INPUT**
Opens the *INPUT SOURCE* list.

**Power**
Turns your TV on or off.

**Numbers**
Enter channel numbers and parental control password.

■
Enters a digital sub-channel number (for example 4.1).

**Menu**
Opens the on-screen menu.

**ENTER**
Confirms selections or changes or opens a sub-menu.

**EXIT**
Closes the on-screen menu.

**ASPECT**
Changes how the picture is displayed on the screen.

**Volume**
Changes the volume.

**SLEEP**
Sets the sleep timer.

**FAVORITE**
Opens the Favorite Channel List.

**INlink Controls**
Control HDMI-CEC devices connected to your TV.

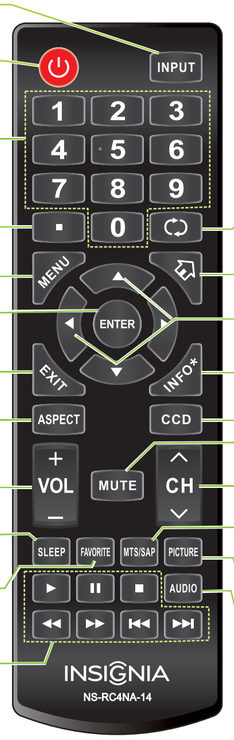


**RECALL**
Returns to the previous channel.

**HOME**
Opens the MHL device's home menu when an MHL device is plugged in.

**Arrows**
Navigate in on-screen menus.

**INFO***
Opens a TV status banner.

**CCD**
Turns closed captioning on or off.

**MUTE**
Mutes the sound.

**Channel**
Changes the TV channels.

**MTS/SAP**
Analog TV – Cycles through mono, stereo, and secondary audio for analog programs.
Digital TV – Selects the audio language from the current channel.

**PICTURE**
Selects the picture mode.

**AUDIO**
Selects the audio mode.

### I already have a universal remote control. How do I make it control this TV?

If you already have a universal remote control that you would like to program to work with your TV and don't want to use the included Insignia remote control, see the table for common codes.

| UNIVERSAL REMOTE TV CODES | |
|---|---|
| **CABLE BOX, SATELLITE BOX, OR OTHER SET-TOP BOX** | |
| **Cablevision** | 068, 069, 078, 096, 100, 164, 168, 229, 026 |
| **Charter** | 2002, 1204, 1423, 1517, 0171, 1963, 0463, 1463, 0842, 1326, 167, 415, 424, 450, 456, 461, 507, 523, 567, 577, 586 |
| **Comcast** | 10171, 11204, 11326, 11463, 11517, 11641, 11780, 11785, 11892, 11963, 12002 |
| **Cox** | 1326, 1463 |
| **Direct TV** | 10171, 11204, 11326, 11517, 11564, 11641, 11963, 12002 |
| **Dish Network** | 720 |
| **Time Warner** | 400, 450, 461, 456, 10463, 1463, 0463 |
| **Tivo** | 0091 |
| **Verizon** | 0198, 0490 |
| **UNIVERSAL REMOTE CONTROLS** | |
| **One for All** | 0054 |
| **Philips** | 0198, 0490 |
| **RCA** | 135 |
| **Sony** | 068, 069, 078, 096 |

For an up-to-date list of codes for other cable providers and universal remote brands, scan this **QR code** or visit www.insigniaproducts.com/remotecodes

INSIGNIA™

**One-year limited warranty**
Visit www.insigniaproducts.com for details.

**Need additional help?**
See your online *User Guide*! This comprehensive guide includes everything from basic how-to steps to more advanced features. A copy of your *User Guide* is not provided in the box but is available online. Go to www.insigniaproducts.com, then click **Support & Service**. Enter your model number in the box under **Manual, Firmware, Drivers & Product Information**, then click ▶.
Check out our **online community forum** at www.insigniaproducts.com for helpful information from other Insignia TV owners.

**We're here for you**
www.insigniaproducts.com
For customer service, call:
**877-467-4289** (U.S./Canada markets)

INSIGNIA is a registered trademark of BBY Solutions, Inc. Registered in some countries.
Distributed by Best Buy Purchasing, LLC,
7601 Penn Ave South, Richfield, MN 55423 U.S.A.

©2013 BBY Solutions, Inc.
All Rights Reserved
1-877-467-4289
www.insigniaproducts.com